DALI Touch Dimmer Switch

(SR-2300TS-CCT-US)

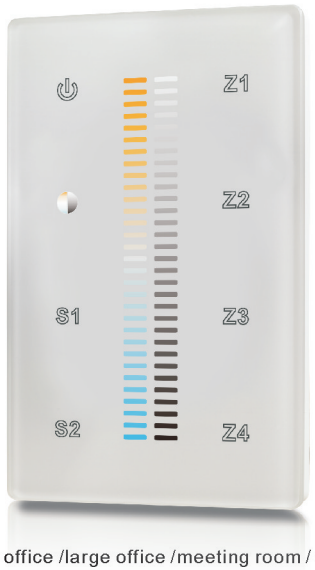

A.White & black plate are available
B.DALI bus powered
C.Start address from 00 to 64.
D. Perfect for industry hall /warehouse / classrooms /single office /large office /meeting room / corridor

Feature

- Comply to DALI standard protocol IEC 62386-102,IEC 62386-207 and in compliance with DALI products from other international incorporation.
- Touch interface operation design, easy to use.
- With bus detective function, one channel DALI bus can install multiple dimmer switchs.
- External power supply.
- Enable to select different single light zone by encoding switch.
  Up to 4 light zones for switchand dimming control.Each zone can be 4 DALI addresses.
- Can save 2 or 3 scenes.
- Suitable for single color and CCT color LED.

Parameter

Part No.	Operation Voltage	Output	Dimensions
SR-2300TS-CCT-US	12-24VDC	DALI Signal	86x86x29.1

Product Size

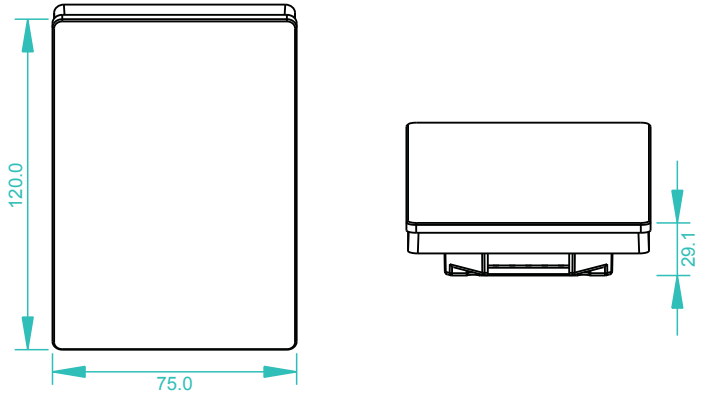

Installation

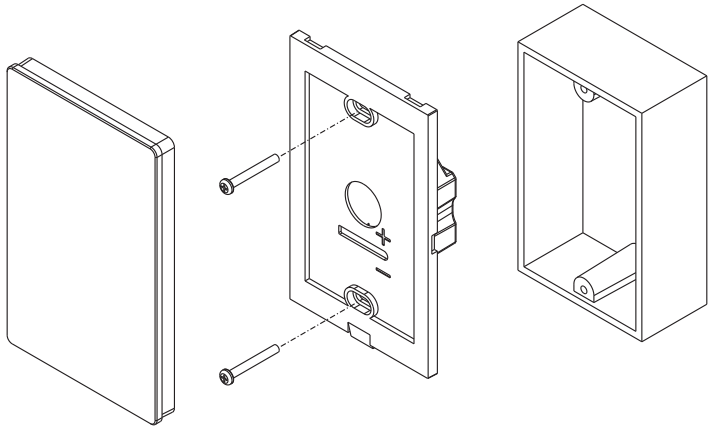

Brief introduction of buttons

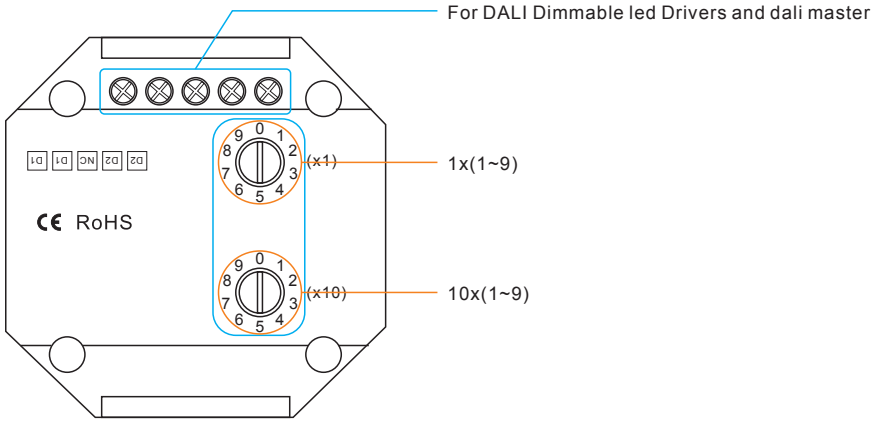

Wiring diagram

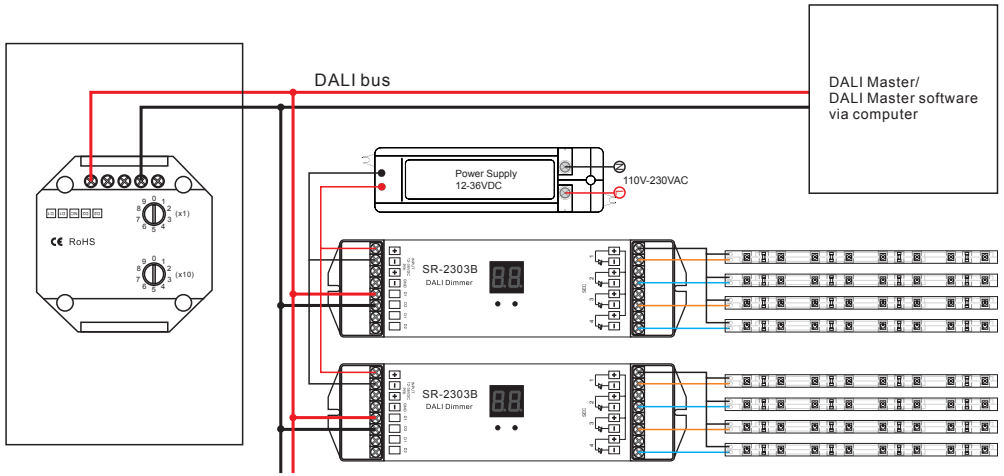

Description of buttons

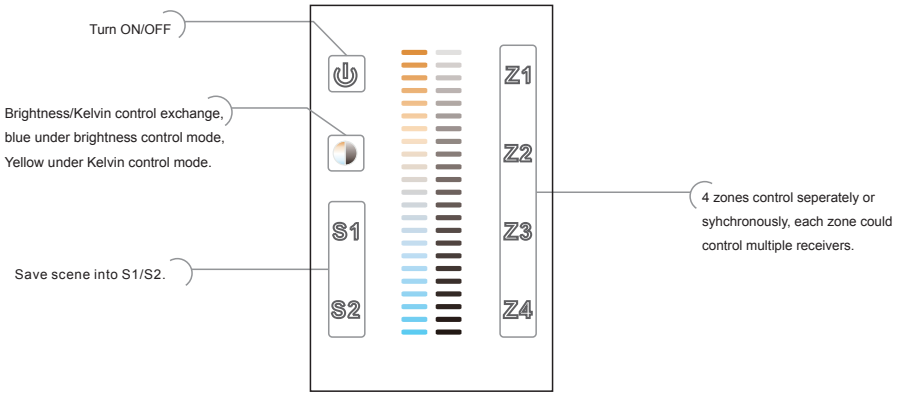

Operation

Set starting number for DALI switch
Set the starting number “X” on SR-2300TS-CCT(with 64 dali address)
Z1 control X,X+1,X+2,X+3 dali address ,
Z2 control X+4,X+5,X+6,X+7 dali adrees ,
Z3 control X+8,X+9,X+10,X+11 DALi address ,
Z4 control X+12,X+13,X+14,X+15 DALi Address

Safety & Warnings

1) The product shall be installed and serviced by a qualified person.
2) IP20.Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
3) Always be sure to mount this unit in an area with proper ventilation to avoid overheating.
4) Please check if the output voltage of any LED power supplies used comply with the working voltage of the product.
5) Never connect any cables while power is on and always assure correct connections to avoid short circuits before switching on.
6) Please ensure that the cable is secured tightly in the connector
7) For update information please consult your supplier.

Warranty Agreement

1) We provide lifelong technical assistance with this product:
- 5-year warranty. We print date on every products, for example :1125 means year 2011,week 25.The warranty is for free repair or replacement and covers manufacturing faults only.
- For faults beyond the 5-year warranty we reserve the right to charge for time and parts.

2) Limited Warrenty
- Any defects caused by wrong operation.
- Any damages caused by unauthorized removal, maintenance, modifying, incorrect connection and replacement of chips.
- Any damages due to transportation, vibration etc. after purchase.
- Any damages caused by earthquake, fire, lightning, pollution and abnormal voltage.
- Any damages caused by negligence, inappropriate storing at high temperatures and humidity or near harmful chemicals.
- Product has been updated

3) Repair or replacement as provided under this warranty is the exclusive remedy to the customer.